







WIFI DOOR SENSOR \ WITH USB CHARGE NAS-DS07W

INSTRUCTION



Product Configuration



Specifications

Detect open/close status of the door/window
Anti-demolition function,push notification when device is removed

Battery:CR123A*1 3V

USB Power supply :5V/1A

Standby current :27.9uA

Wireless frequency: 2.4GHz

Wireless standard: IEEE 802.11b/g/n

Wi-Fi range: 45M

Size:

Main body: 82mm x 27mm x 23mm

Deputy body: 50mm x 13mm x 16mm

LED State

Device Status	LED State
Smart Wi-Fi	Indicator flashes 2times/s
AP mode	Indicator flashes 1time every 2s
Turn on	Indicator flashes
Turn off	Indicator off
Reset/Adding mode	Pressing button for 5-7s

Notice: Powered by USB,door sensor won't be in sleep mode

How to reset?

(1) Press the reset button for 6 seconds till the indicator flash rapidly.Then device turns to smart wifi mode.

(2) Press the reset button again for 6 seconds till the indicator flash slowly. The device turns to AP mode.

Get Started with Tuya Smart App



Smart Life



Android APP



IOS APP

1. Download APP

- Download the "Smart life" app from APP Store or Google Play to your mobile.

2. Register and Login

- Launch the "Smart life" app.
- To register,enter your mobile phone number or email address,create a password ,then login to the app.
- Login if you have an account already.**

3. Add Device

- Open up the sensor and remove the battery sticker Press the reset button for 6 seconds till the indicator flash rapidly.
- Then device turns to smart wifi mode.
- Select the "+" symbol on the top right-hand corner

- Select "Contact sensor Wi-Fi" form Sensors in the left


- If the connecting fails,try using AP Mode**

- On the "Add device" page select "AP Mode" on the top right-hand corner and follow the instructions of the app. Finally,have fun!



Contact Sensor (Wi-Fi)

What's the App User Interface Like ?

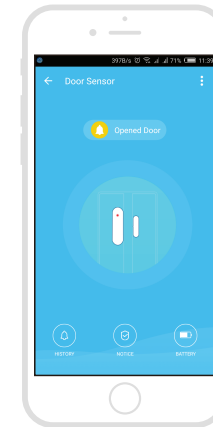

Smart life


Experience Advanced Features

You can experience the various advanced features of the product with the app, just try and do it yourself.

Main fuction

Tamperproof

- When the door magnetic shell is removed, the app will receive the push notice and report the door magnetic open / close status (the tamper-proof alarm has push notification only , no history)



Alarm record

- Device record
- APP recording: Check all the added devices alarm message in history

Other fuction

Linkage alarm setting

- To connect two Sensors via scene setting.

Device sharing

- Allow others to control the device

Push notification

- Open/close push notification

Remove device

- Restore default settings; Delete and add the device again to clear the record by APP.



Make Your Home Smarter